




Tuya Access Control Systems

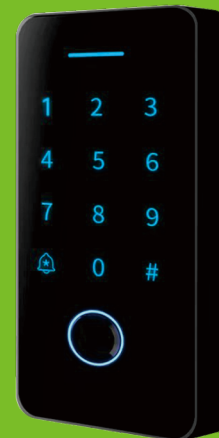

F100

### Specifications

|                      |                   |                          |   |
|----------------------|-------------------|--------------------------|---|
| Operating Voltage    | DC9-16V           | key type                 | full touch                                  |
| Quiescent Current    | <30mA             | Output mode              | NO COM NC contact                           |
| Working current      | <100mA            | Wiegand interface        | WG26/34                                     |
| Fingerprint capacity | 100 pieces        | Operating mode           | Support normally open function              |
| Card capacity        | 8000 user cards   | Remote control frequency | 315M  |
| Card reader type     | ID&IC both        | Waterproof type          | Surface waterproof/IP68                     |
| Remote unlock        | Tuya remote       | Operating temperature    | -20°C-70°C                                  |
| Reading distance     | greater than 2 cm | Working humidity         | 0-95%                                       |
| Product Size         | 136x70x18mm       | Way of opening the door  | Fingerprint, ID&Mifare Card, password, WIFI |

### Features

- 100 fingerprints
- 8000 user card + password
- EM+ Mifare cards support
- Voice/Doorbell
- WIFI TUYA APP
- Waterproof

### Dimensions

